


# Submitted Model No.:

### Specific Features:

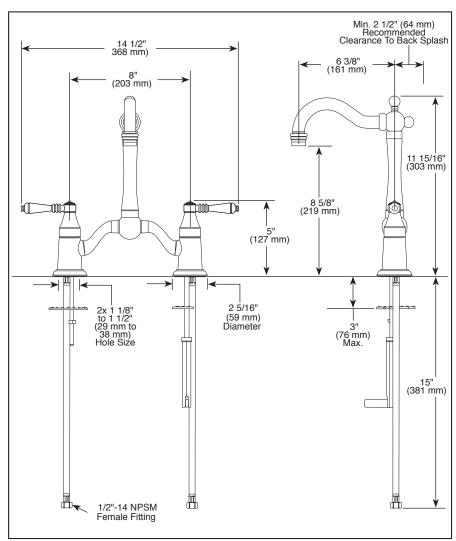

▲ Designate Proper Finish Suffix

# BRIZO

# BAR/PREP FAUCETS

- Tresa<sup>®</sup> Kitchen Collection
- Two Handle Widespread Bridge
- Two Hole Mount

#### **STANDARD SPECIFICATIONS:**

- Solid brass with one-piece cast brass waterway.
- 6 3/8" (162 mm) long, 11 15/16" (303 mm) high rigid spout.
- Spout swings 360°.
- 1/4 turn handle stops.
- Hot and cold stems are interchangeable.
- Control mechanism shall be of the rotating cylinder type with 90° rotation, with replaceable non-metallic seats, operating in stainless steel lined sockets.
- Max.1.80 gpm @ 60 psi, 6.8 L/min @ 414 kPa
- Ceramic disc valving.

## **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1

  Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.