


Features

- 3 bolt tank-to-bowl connection
- 1.28 gpf / 4.86 lpf low water consumption
- Uses 20% less water than conventional toilets
- Round front bowl
- 3" hybrid flush valve
- Pilot operated fill valve
- 12" rough-in
- Color-match trip lever
- 1-7/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in white and standard colors: biscuit, bone







Components _____

Model #	Description		Codes/Standards
---------	-------------	--	-----------------

4130-3121	Round front, two-piece toilet. Less toilet seat and supply. Specify color.		
4130	Round front toilet bowl only. Less toilet seat. Specify color.		
3121	Tank and cover only, with left hand, front-mount, color-match trip lever. Less supply. Specify color.		
3121RH	Same as model 3121, with right hand, color-match trip lever. Less supply. Specify color.	Secretary Tollet	
3120	Same as 3121 with chrome trip lever.	UPC HET	
3120RH	Same as 3120 with right hand trip lever.		
3122	Same as model 3121, with tank liner.		
*4130CTK	Round front, (1.28 Gpf/4.86 Lpf) complete toilet kit. Includes toilet seat, tank and bowl, flange bolts, wax ring with polyethylene flange and instructions.		
*4130LTCTK	Same as 4130CTK, with tank liner.		
SB100	Alto Round, toilet seat. Specify color.		






Specifications

Model #	Description	Codes/Standards	
4130-3121	Round front (1.28 gpf/4.86 lpf) two-piece toilet	HIGH EFFICIENCY TOLLET	

Specification	Description	Specification	Description
Material	Vitreous China	Trap Diameter	1-7/8"
Water Pressure Range	20 to 80 PSI	Trap Seal	2-5/8"
Flush System	3" hybrid flush valve	Rough-in	12"
Water Usage	1.28 gpf / 4.86 lpf	Shipping Weight	Model 4130 - 48 lbs., Model 3121 - 33 lbs., Model 4130CTK and 4130LTCTK - 85 lbs.
Water Surface Area	8-3/16" X 9-1/8"	Warranty	Vitreous China - Limited Lifetime
MaP Rating	600 grams		Tank Trim - Limited One Year

Technical Information

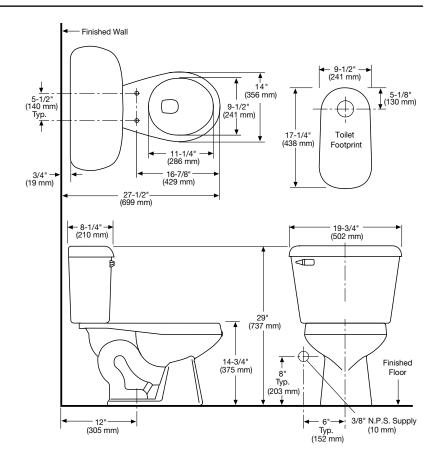

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.

